FEATURES

1. Ultra-wide 85 - 305VAC and 70 - 430VDC input voltage range
2. Operating ambient temperature range -40°C to +85°C
3. Compact size, open frame
4. High reliability, green power
5. Industrial-grade design
6. Flexible selection of EMC addtional circuits, simplify customer PCB layout
7. Output short circuit, over-current protection

RoHS CE 3 years Warranty

Selection Guide

Part No.	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
RAS01-K3B05SS	1W	5V/200mA	57	500
RAS03-K3B12SS	3W	12V/250mA	73	330

Warning: Non-isolated power supply, there is no insulation protection between output and input dangerous voltage, beware of electric shock!

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	–	305	VAC
	DC input	70	–	430	VDC
Input Frequency		47	–	63	Hz
Input Current	115VAC	–	–	0.12	A
	277VAC	–	–	0.06	
Inrush Current	115VAC	–	25	–	
	277VAC	–	40	–	
Recommended External Input Fuse		1A/300V, slow-blow, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	10% - 100% load	5V	–	±1.5	-7~+3	%
		12V	–	±2.5	-5~+8	
Line Regulation	Rated load	5V	–	±1.5	–	
		12V	–	±1	–	
Load Regulation	5V		–	±2.5	–	
	12V		–	±2	–	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		–	80	150	mV
Temperature Coefficient			–	±0.12	–	%/°C
Stand-by Power Consumption	230VAC input	5V	–	–	0.3	W
		12V	–	–	0.4	
Short Circuit Protection			Hiccup, continuous, self-recovery			
Over-current Protection			≥110% Io, self-recovery			
Minimum Load			10	–	–	%

Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		-40	–	+85	℃
Storage Temperature		-40	–	+105	
Storage Humidity		–	–	95	%RH
Soldering Temperature	Wave-soldering	260 ± 5℃; time: 5 - 10s			
	Manual-welding	360 ± 10℃; time: 3 - 5s			
Power Derating	-40℃to -20℃	2	–	–	%/℃
	+70℃to +85℃	2.67	–	–	
	85VAC - 110VAC	0.8	–	–	%/VAC
	277VAC - 305VAC	1.1	–	–	
Safety Standard		BS EN62368-1/EN62368-1 (Report) Safety Approval; Design refer to IEC/UL62368-1			
MTBF		MIL-HDBK-217F@25℃>300,000 h			

Mechanical Specifications

Dimension	16.13 x 15.10 x 8.70 mm
Weight	4.2g (Typ.)
Cooling method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (See Fig. 1 for typical application circuit)	
		CISPR32/EN55032	CLASS B (See Fig. 2 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (See Fig. 1 for typical application circuit)	
		CISPR32/EN55032	CLASS B (See Fig. 2 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ± 6KV/Air ± 8KV (See Fig. 1 for typical application circuit)	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m (See Fig. 2 for recommended circuit)	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (See Fig. 1 for typical application circuit)	perf. Criteria B
		IEC/EN61000-4-4	±4KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±1KV (See Fig. 1 for typical application circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s (See Fig. 2 for recommended circuit)	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70% (See Fig. 2 for recommended circuit)	perf. Criteria B

Product Characteristic Curve

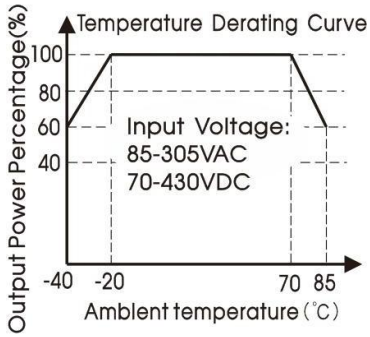

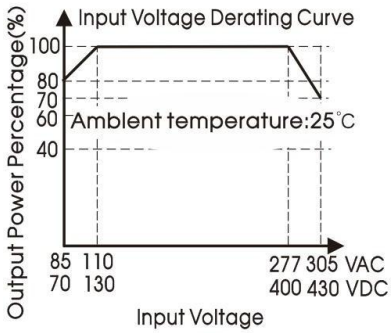

Note:

① With an AC input between 85 - 110VAC/277- 305VAC and a DC input between 70 - 130VDC/400 - 430VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling

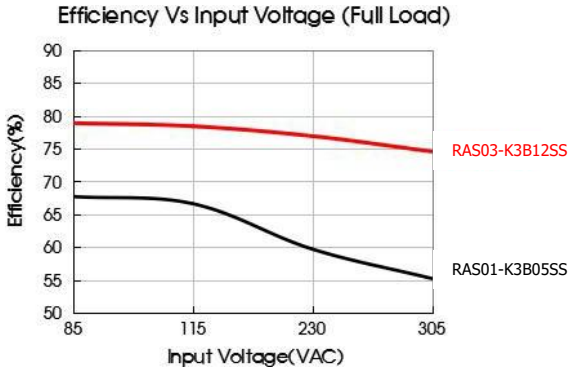

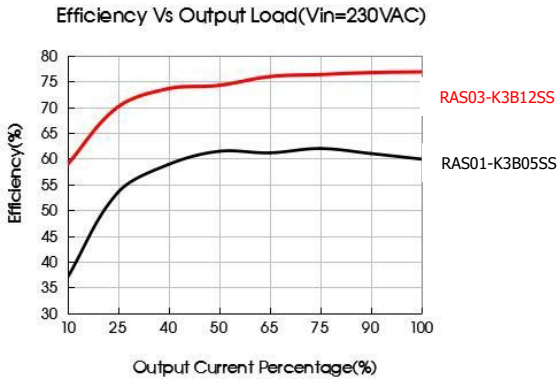

Design Reference

1. Typical application

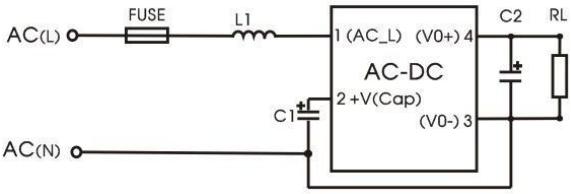

Fig. 1

Part No.	FUSE (required)	C1 (required)	C2 (required)	L1 (required)
RAS01-K3B05SS	1A/300V	10uF/400V: 165-264VAC 10uF/450V: 165-305VAC 22uF/400V: 85-264VAC 22uF/450V: 85-305VAC	220uF/16V	1.2mH
RAS03-K3B12SS				

Note:
C1 is used as filter capacitor(required), if the surge immunity index is to be met, the C1 capacitor needs to be connected to 22uF;
Output filter: We recommend using an electrolytic capacitor with high frequency, high ripple current and low ESR rating for C2 refer to manufacture's datasheet). Combined with L1, they form a pi-type filter circuit. Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%.

2. EMC compliance recommended circuit

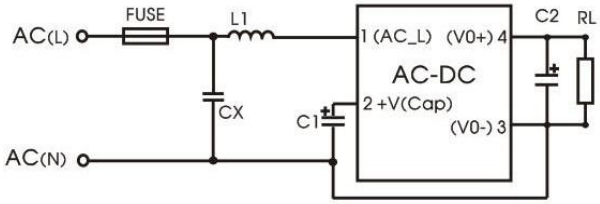

Fig. 2

Components	Recommend Parameter
CX	0.1uF/310VAC
L1	1.2mH
FUSE (required)	1A/300V, slow-blow, required
C1 (required)	10uF/400V: 165-264VAC 10uF/450V: 165-305VAC 22uF/400V: 85-264VAC 22uF/450V: 85-305VAC
C2 (required)	220uF/16V

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

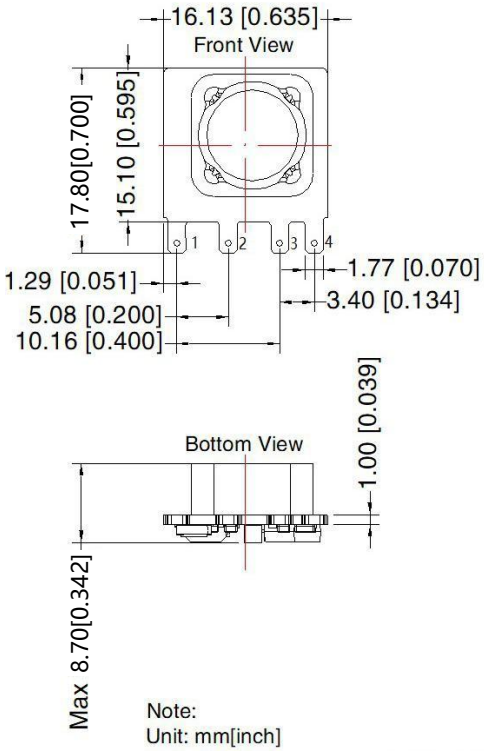



Note：Grid: 2.54*2.54mm

Pin–Out	
Pin	Function
1	AC(L)
2	+V(CAP)
3	AC(N)/–Vo
4	+Vo

Note:
Unit: mm[inch]
Pin section tolerances: ±0.10[±0.004]
General tolerances: ±1.0[±0.04]
The layout of the device is for reference only,
please refer to the actual product

Notes & Instructions

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at Ta=25℃, humidity <75%RH, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;